


Thamesmead Multi Waterstruck

DSEMA-BCr



CAMTECH

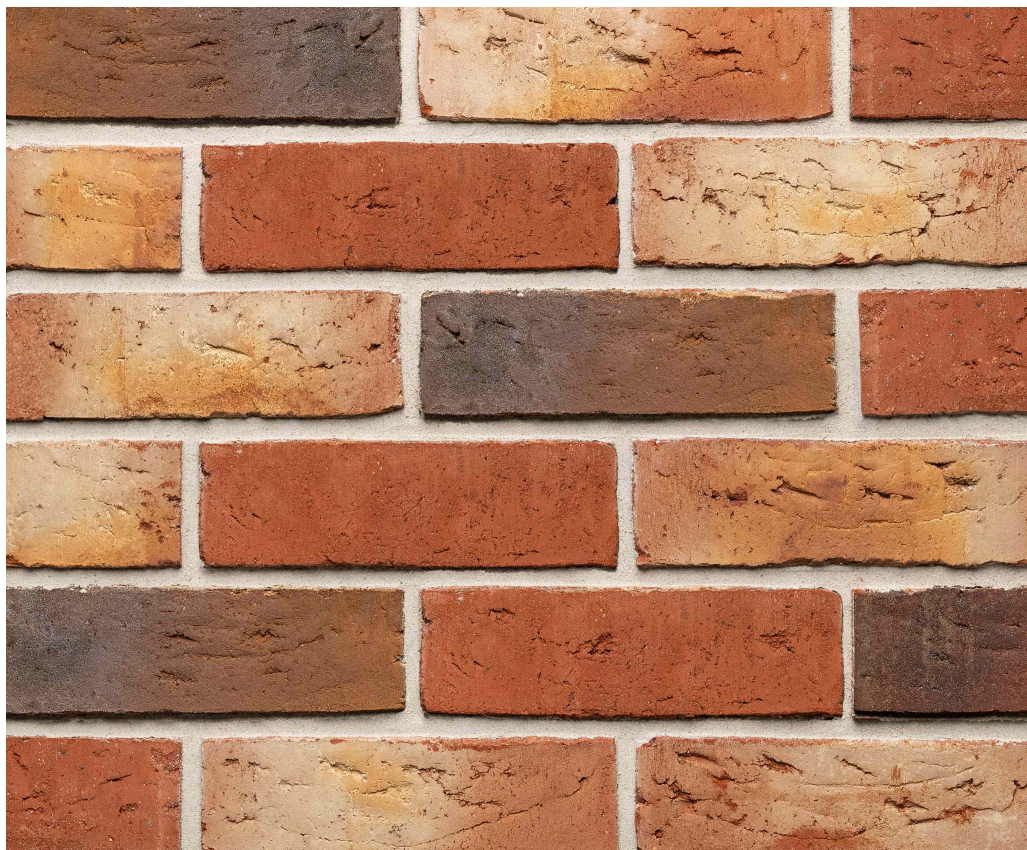

NEN-EN 771-1, APRIL 2013, AND NEN-EN 771-1/A1, MARCH 2005 CATEGORY 1, HD CLAY BRICKS PRODUCTION REFERENCE CODE: CAPRICE DSEMA-BCr

LENGTH:	215mm, T2 (+/- 4mm), R1 (9mm)
WIDTH:	102mm, T2 (+/- 3mm), R1 (6mm)
THICKNESS:	65mm, T2 (+/- 2mm), R1 (5mm)
APPEARANCE:	HANDMADE OR STOCK WITH FROG (<20% OF THE VOLUME, EURO GROUP 1)
AVERAGE COMPRESSIVE STRENGTH:	> 12.5 N/mm²
DIMENSIONAL STABILITY:	NPD
BOND STRENGTH:	MEAN. 0.15 N/mm²
ACTIVE SOLUBLE SALTS:	S2
REACTION TO FIRE:	EURO CLASS A1
WATER ABSORPTION:	<18% m/md
INITIAL RATE OF WATER ABSORPTION:	IW3 NORMAL SUCTION, 1.5 - 4.0kg/m².min
WATER VAPOUR DIFFUSION COEFFICIENT:	5/10
GROSS DRY DENSITY:	1650kg/m³, D1 (10%, +/- 165kg/m³)
THERMAL CONDUCTIVITY:	0,37 W/mK
FREEZE/THAW RESISTANCE:	F2

NOTE:

DIMENSIONS MAY VARY DEPENDING ON THE PRODUCTION. FOR THE MOST RECENT VERSION SEE WWW.CAMTECHBP.CO.UK. THIS DOCUMENT IS NOT BINDING AND ANNULS ALL PREVIOUS PUBLICATIONS. THE MANUFACTURER RESERVES THE RIGHT TO CHANGE THE PRODUCT RANGE AND CHARACTERISTICS. THE USER MUST ALWAYS CHECK THAT THEY HAVE THE MOST RECENT DESCRIPTIVE TEXT.

SHOWROOM & HEAD OFFICE:

21/23 JARMAN WAY, ROYSTON, HERTFORDSHIRE, SG8 5HW

01763 262 006